



DC2-400A (2V400Ah)

DC (Deep Cycle) series is specially designed for frequent cyclic discharge. By using strong grids and specially designed active material, the DC series battery offers 30% more cyclic life than the standby series. It is suitable for solar energy systems, marine and RV etc.



Specification

Cells Per Unit	1
Voltage Per Unit	2
Capacity	400Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 26.0 Kg (Tolerance $\pm 2\%$)
Max. Discharge Current	2000 A (5 sec)
Internal Resistance	Approx.0.7 m Ω
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C \pm 5°C
Float charging Voltage	2.27 to 2.3 VDC/unit Average at 25°C
Recommended Maximum Charging Current	80 A
Equalization and Cycle Service	2.43 to 2.47 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Thread insert & Bolt (F10)
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



Dimensions

Unit: mm Dimension: 171 (L) \times 196 (W) \times 330(342) (H)

Terminal F10

Constant Current Discharge Characteristics: A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	543.1	400.5	249.8	153.2	114.1	81.87	71.66	64.34	51.94	41.66
1.65V	516.4	384.6	246.6	147.6	109.3	79.00	70.94	62.79	49.61	41.27
1.70V	481.5	362.5	241.8	145.2	106.9	78.28	69.93	61.24	48.84	40.87
1.75V	427.5	326.2	222.6	137.3	101.3	73.97	69.03	58.14	47.29	40.43
1.80V	368.0	297.2	209.9	130.9	97.36	73.26	67.83	57.36	46.51	40.06
1.85V	311.2	267.5	193.9	123.7	92.57	67.51	63.84	54.26	44.19	37.61

Constant Power Discharge Characteristics: W (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	950.8	729.9	464.8	286.7	212.7	153.9	142.5	124.1	98.84	83.01
1.65V	925.9	726.0	462.3	282.5	208.5	151.6	141.1	122.6	98.00	82.22
1.70V	874.6	687.1	457.7	278.4	205.3	151.0	139.5	119.7	96.49	81.73
1.75V	779.1	619.2	429.3	263.5	197.9	143.4	137.5	113.8	93.45	80.90
1.80V	674.3	564.9	408.3	251.7	189.8	142.7	135.1	112.5	91.94	80.24
1.85V	575.0	509.4	378.7	238.3	180.8	132.2	127.5	106.5	87.37	75.60


All mentioned values are average values (Tolerance $\pm 2\%$).

DC2-400A


2V400Ah




Life characteristics of cyclic use

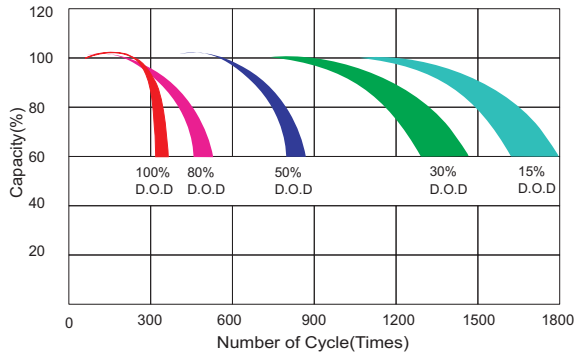


Storage characteristic

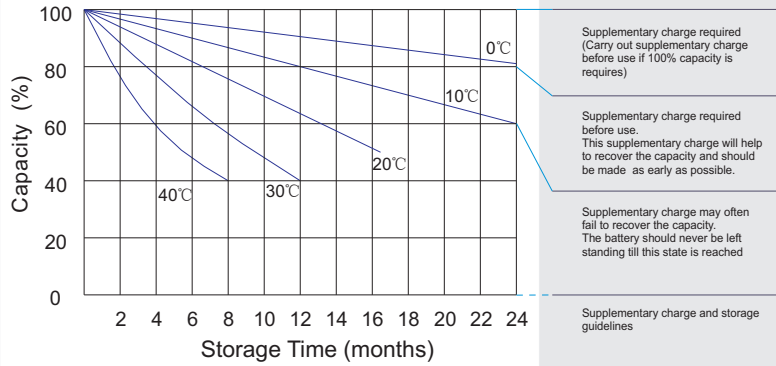

Charge characteristic Curve for standby use

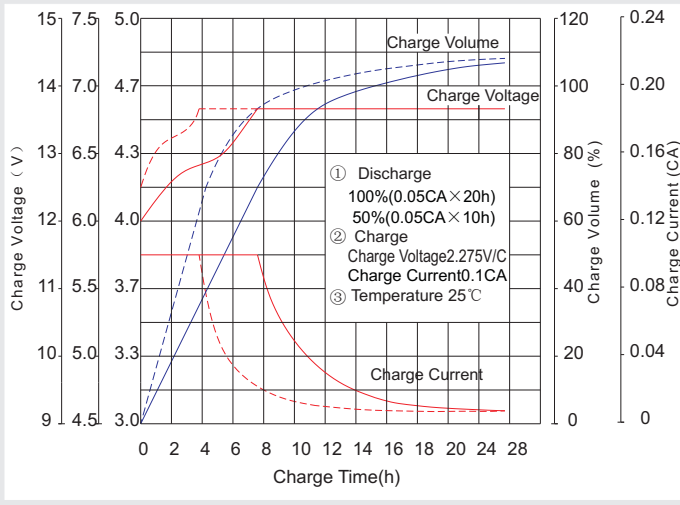

Discharge characteristic curve

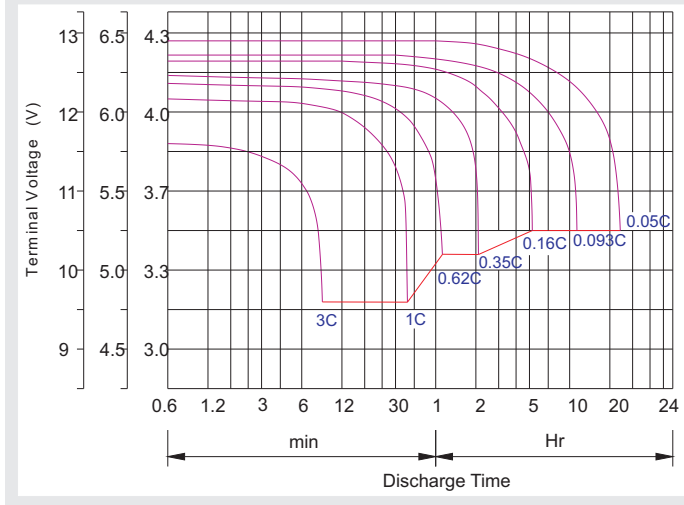

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Cycle service

- ※ Avoid battery over discharge, especially battery series connection use.
- ※ Charged with recommend voltage, ensure battery can be full recharged.
- In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ※ Effect of temperature on float charge voltage: -4mV/°C/Cell.
- ※ There are a number of factors that will affect the length of cyclic service.
- The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
- Generally specking, the most important factors is depth of discharge.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.2C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.2Cx6h

Bolt	M5	M6	M8
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6~7N·m	8~10N·m	10~12N·m

SHEN ZHEN RITAR POWER CO.,LTD.

URL:www.ritarpower.com

Address: Rm405, Tower C, Huahan Building, Langshan Rd16, Nanshan District, ShenZhen, 518057, China

Tel:+86-755-33981668 Fax:86-755-8347-5180

2014 - Version 0