



# RA12-55H

(12V55.0Ah)  
(200w/cell)

HR (High Rate) series is especially designed for heavy load discharge applications with 10 years design life in float service. By using strong grids and specially designed active material the HR series offers stable performance during high current discharge requirements. The HR series offers 30% more power output than the standard range. Suitable for UPS/EPS where high current loads are required.




## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	200W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 18.0 Kg(Tolerance ± 3%)
Max. Discharge Current	550A (5 sec)
Internal Resistance	Approx. 5.7 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current	16.5 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Faston tabF11/F15
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



## Dimensions

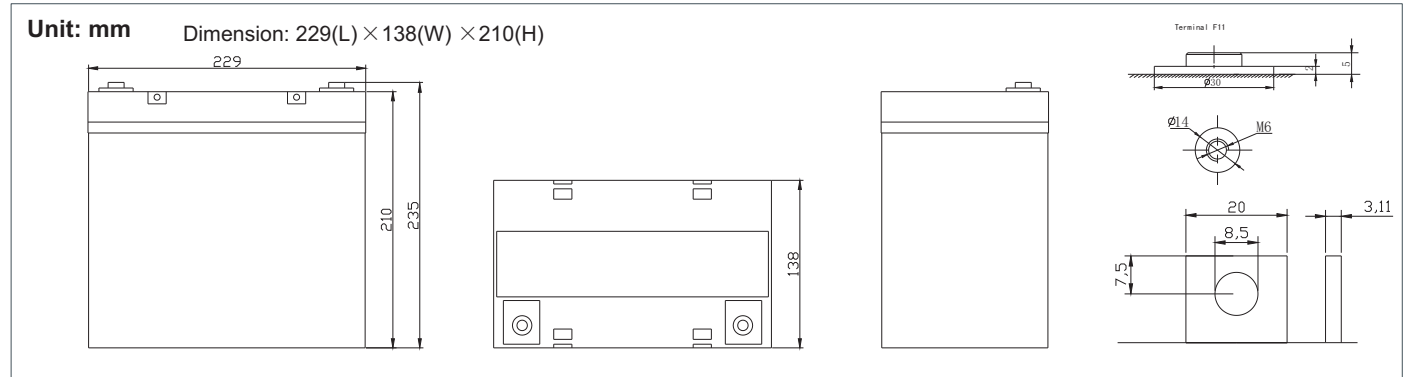

### Constant Current Discharge Characteristics : A(25°C)


F.V /Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
9.60V	208.2	170.8	154.4	113.3	90.93	64.97	36.39	29.01
10.0V	202.2	161.8	153.6	110.7	85.63	62.57	35.67	28.01
10.2V	196.2	157.9	145.5	106.3	83.35	61.51	35.06	27.51
10.5V	176.2	152.0	132.9	100.9	79.34	59.24	34.24	26.99
10.8V	159.0	146.0	119.0	96.39	76.81	56.79	33.43	26.53
11.1V	135.8	134.5	109.5	91.86	74.06	54.89	32.40	25.46

### Constant Power Discharge Characteristics : W(25°C)


F.V /Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
9.60V	2197	1813	1716	1320	1004	724.9	406.8	324.6
10.0V	2153	1740	1703	1297	955.0	704.8	398.1	315.2
10.2V	2129	1694	1626	1259	936.5	694.2	395.1	311.8
10.5V	1938	1656	1513	1219	902.8	677.7	392.9	310.1
10.8V	1765	1590	1483	1168	875.1	655.2	386.3	307.7
11.1V	1550	1506	1454	1117	855.5	635.5	379.2	298.6

All mentioned values are average values (Tolerance ± 2%).

### Effect of temperature on long term float life

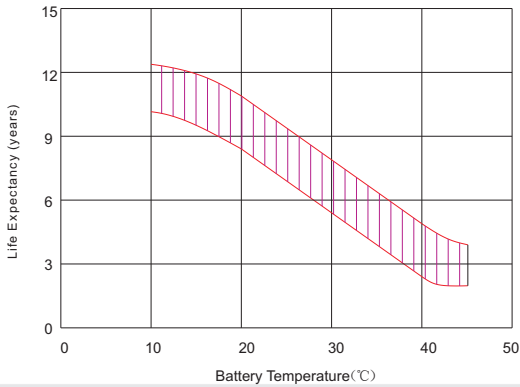

### Storage characteristic

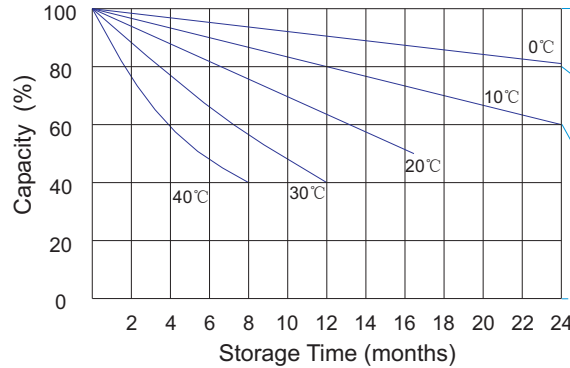


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is requires)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guidelines

### Charge characteristic Curve for standby use

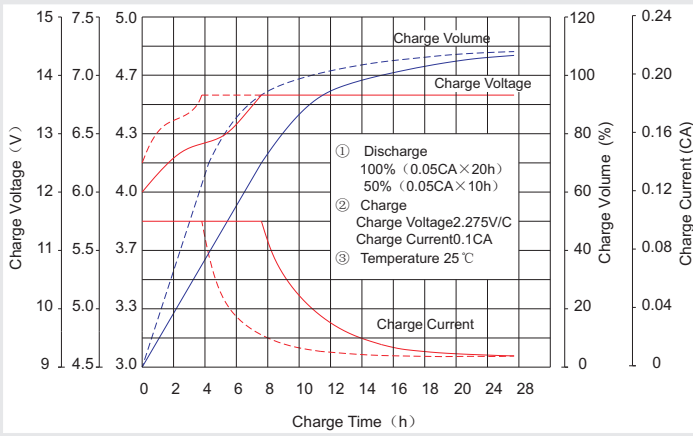

### Discharge characteristic Curve

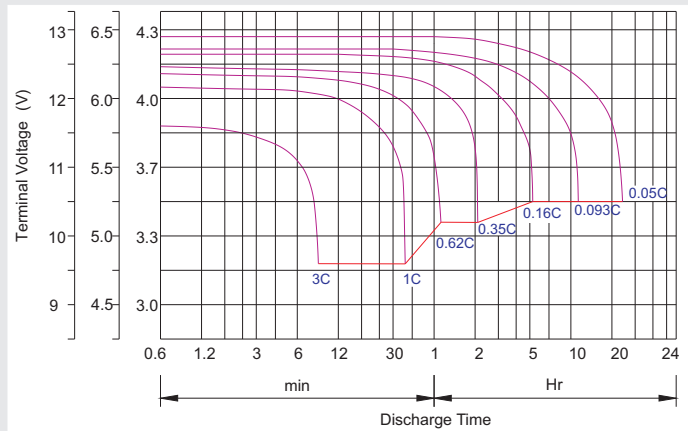

### Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

Bolt	M5	M6	M8
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6~7N·m	8~10N·m	10~12N·m

### Maintenance & Cautions

#### Float Service:

- ※ Every month, recommend inspection every battery voltage.
- ※ Every three months, recommend equalization charge for one time.

Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.

- ※ Effect of temperature on float charge voltage: -3mV/°C/Cell.

- ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.